




# 140lm/w high light efficiency LED Strip

## SC-IG3-PXX-12-01-UL


### Features:

1. 2835 LED
2. 12V DC, 21.6W/M
3. 140lm/w, white/natural white /warm white
4. 60led/m, min cut 33.3mm
5. IP20
6. MAX length: 3m
7. Note: work with aluminum heat sink
8. UL, TUV, CE, ROHS, 3 years warranty

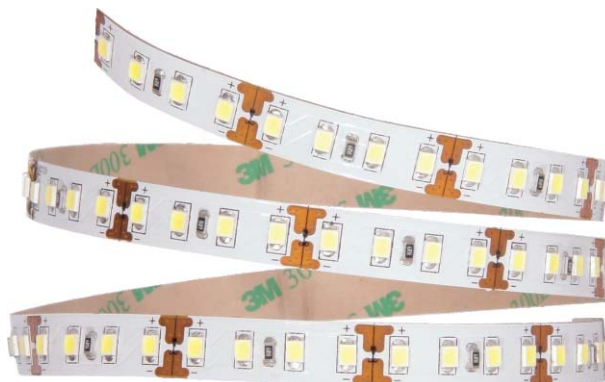

### Application:

Advertising billboard, backlit decoration, architecture, bar, dance hall, wine cabinet, floor, ceiling, etc.

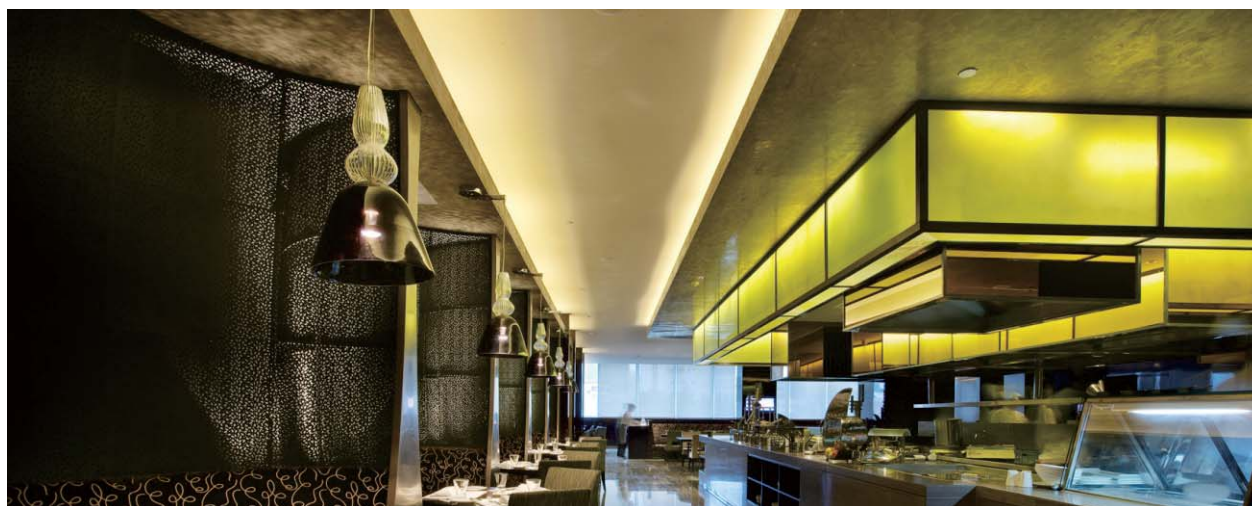


### Technical parameters :

Model	Width (mm)	Max. Length (m)	Min.Length (mm)	LED Type	LED Qty. (pcs/m)	DC Voltage (V)	Max. Power (w/m)	Luminous Flux (lm/m)
SC-IG3-PW-12-01-UL	10	3	33.3	2835	120	12	21.6	2880
SC-IG3-PNW-12-01-UL								2800
SC-IG3-PWW-12-01-UL								2500



## Dimension (Unit:mm):

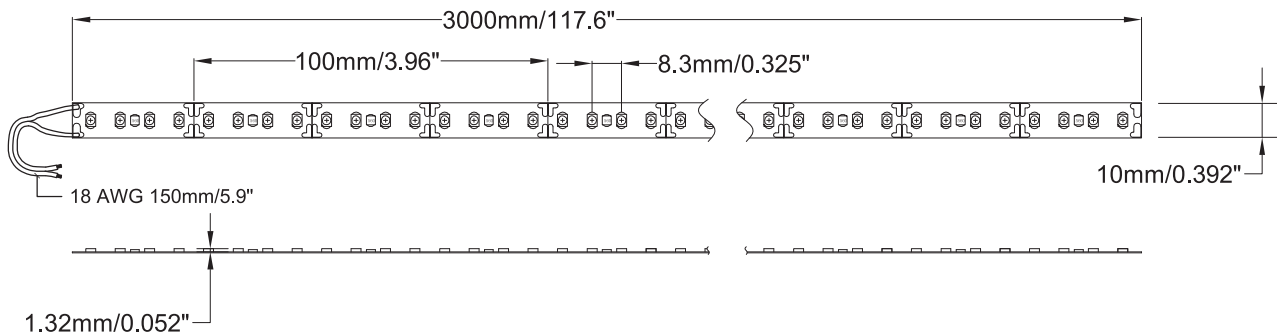

## Installation requirement:

1. Installed on flame-retardant surface, wood and material exceed 2mm thickness
2. Please first read the product specification carefully, make sure the using environment conform to specification, then it can be used
3. Confirm input voltage and power off before use
4. Connection can't exceed 3m, and the strip must be used with aluminum profile and other radiators
5. Cut the strip according logo on the strip

2015-08-11