



LINEX-B Floor Lamp

FL-LINEX-B-015-AW-SV

FL-LINEX-B-015-AW-BK



Features:

Adjustable angle: three blades of light can rotate at any angle, which flexibly adjust illumination area and angle. Downward lighting is suitable for reading, and inclined lighting is suitable for creating an atmosphere, so the lamp is suitable for many applications.

Detachable module: modularized wireless plug installation provides various choices for form and light source.

Special lighting effect: adopt LEDs light source, small and thin luminous module, break lighting state of floor lamp.

Modern molding: molding is full of sculpture sense and artistry.

Small packing: removable parts ensure small package, easy to transport.

Convenient interaction: touch switch position is in the height which people can operate most; moderate color light and shade in a human manner.

More support: change bluetooth device name via mobile phone APP, support SPP protocol, support BLE protocol.

Absolute originality: has independent intellectual property rights (product design patent and utility model patent).

Good compatibility: APP support iPhone, iPad, HTC, Samsung and other device with bluetooth function, easily matched; easily play music.

Sounds of nature: built-in efficient audio processing chip and dual voice coil quality speaker, bright treble, mellow middle, deep bass; Bring you the perfect music to enjoy.


Give you more choice: color, APP interface, the whole height can be customized.



Technical parameters:


Power: system 15W, 10W lamplight,3W loudspeaker	LED type(qty.): 3014 warm white 144PCS/white 204PCS
Input voltage:AC90-240V	Main material:aluminum alloy,steel
Output voltage: DC12V,1.5A, constant voltage	Luminous flux: 521
Power efficiency:80%	Lighting effect:52.1 LM/W
Control type: touch, APP	CCT: 2600-6500
APP support platform:android 4.4 and above, IOS8.0 and above	Lamp body color:black, silver
	Inner box/boxes dimension:420*335*166mm
Wireless connection method spec.:bluetooth V4.1,ClassII.	Net weight of single piece:6.67kg
Frequency range: 2.4~2.48GHz,ISM band	Gross weight of single piece:7.57kg
Support protocol: A2DP V1.2,AVRCP V1.4 Profiles	Carton dimension:677*435*360mm
Wireless transmission distance:15m	Packing qty.:4
Loudspeaker unit: inner magnetic 40mm 16- core dual porcelain 4Ω3W	Gross weight of carton:32kg
	Working environment: temperature-10-55 ℃ ; humidity 10%~80%
Speaker system: 2.0 sound track	Storage environment:temperature-20-75 ℃ humidity10%~90%
Sensitivity:-85dBm@0.1% BER Frequency range:20-20k	Main function: dimming, color modulation,bluetooth speaker ,timing switch,can be packed separately.
Distortion factor: ≤1% dB:75dB	
Optional power plug: European safety standards,American standard, British standard , Australian standard	

Dimension(Unit:mm/inch):

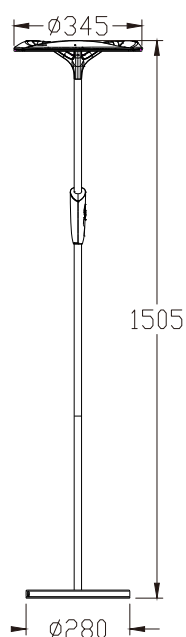




Installation diagram:

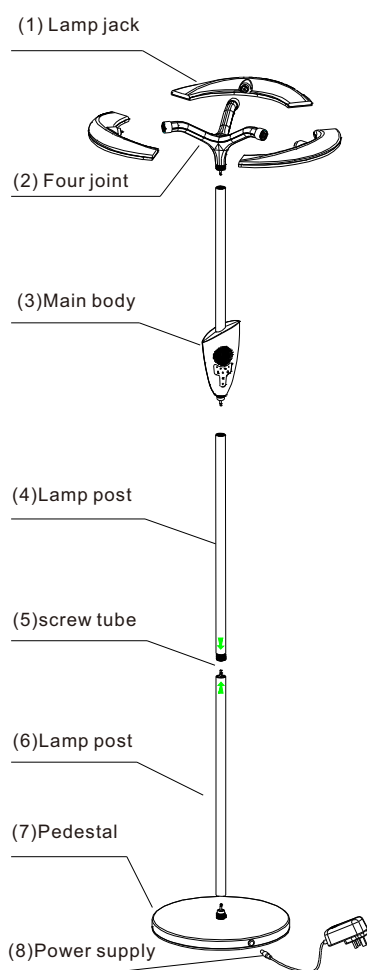

- Step 1: Tightening two ends of (4) lamp post and (6) lamp post with arrow head;
- Step2: Tightening the integrated lamp post to (7) chassis;
- Step3: Tightening (3) main body to (4) lamp post;
- Step 4: Tightening (2) to tube of (3) mainbody;
- Step 5: Insert (1) lamp socket into (2) 4-joint, and insert in place without gap.
- Step6: Insert (8) power supply into (7) chassis;
- Step7: Connect (8) power supply to high voltage;
- Step8: If 4 indicators on (3) main body are in full bright, equipment enter into standby state, and finish assembly;
- if there is roar, please unplug (8) power supply, then unplug 3 pieces (1) lamp jack, finally repeat operation from step4 to step8.

Operation instruction:

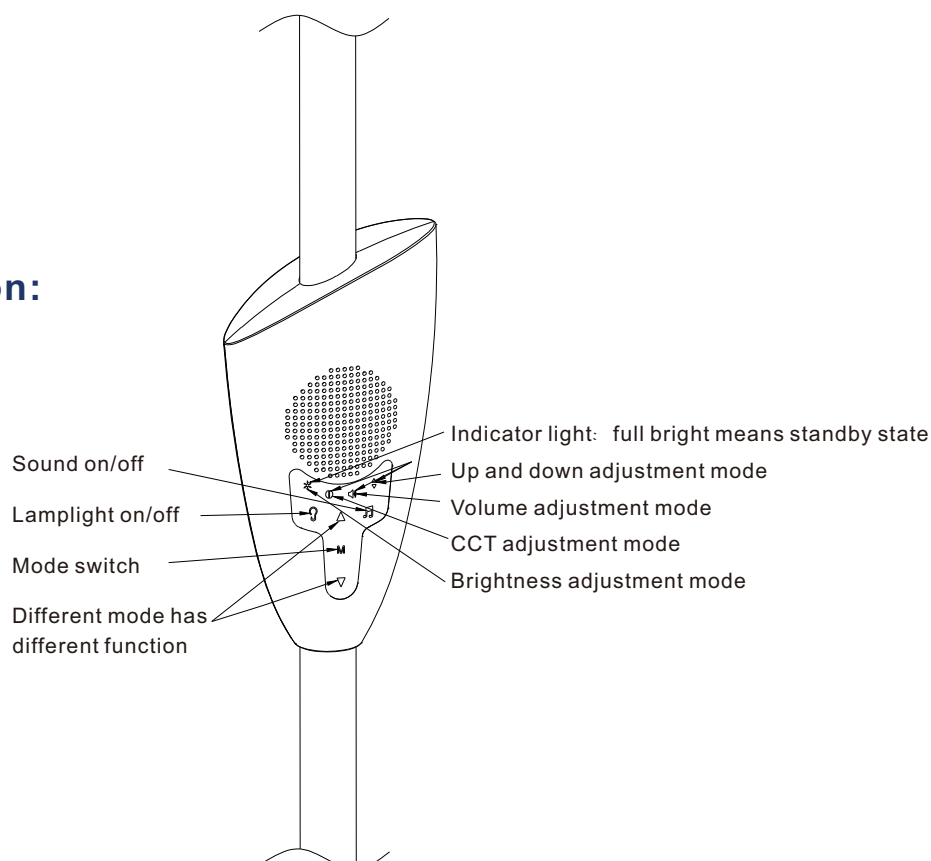



APP operation instruction:



Figure 1

Open the interface(main interface) (figure 1)



When turn off state click, turn on the light ; when turn on state click,

turn off lamplight and music,and exit APP;



When turn on lamplight and music, enter into light control interface

(figure2) or music control interface (figure3);



Enter into menu setting interface.

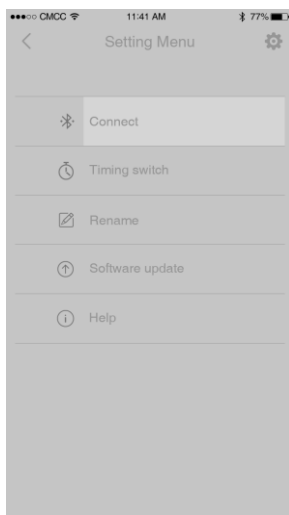


Figure 4



Back to previous level

Each set item refer to 5,6,7; click "Connect" to enter into bluetooth connection interface of mobile phone (android equipment).Apple equipment refer to figure 8.

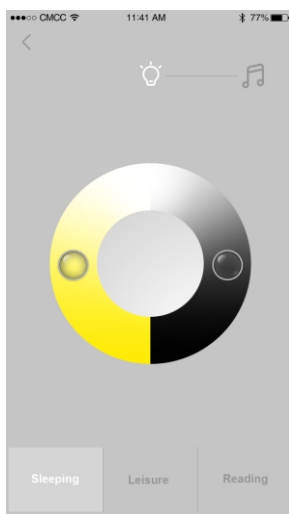


Figure 2



Click turn-on state, Turn on light during turn-off state (medium CCT and volume);



Adjust CCT via the left ring;adjust brightness via the right ring;

Sleeping: yellow light 10% bright, white light 30% bright, operate for 4 minutes; and go out gradually in 30 seconds. Leisure: yellow light 50%, white light 50% bright operate. Reading: yellow light 80% bright, white 100% brightness operate. Click to start corresponding mode, click again to turn off corresponding mode. When "Sleeping" mode start, adjust CCT or brightness, still work 4 minutes, then go out gradually in 30 seconds. When "leisure", "Reading" mode start, adjust CCT or brightness, corresponding mode is canceled.

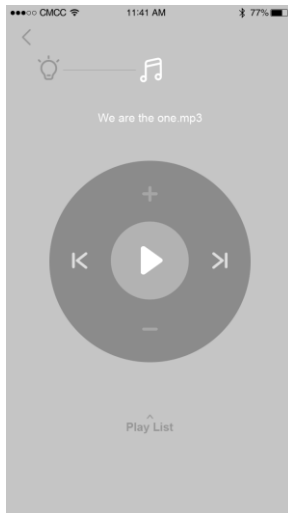



Figure 3

 Click when in open state, turn off music and return main interface; click to turn on music when in off state; the interface can be switched via sliding left or right.

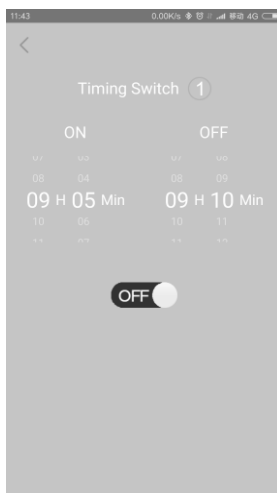



Figure 5

Time setting of power on/power off, turn on/ turn off music and light when power on/off.  slide up and down to set time. After setting on/off time, click "on" to finish. 3 groups time switch can be set, and slide left and right to switch time group.

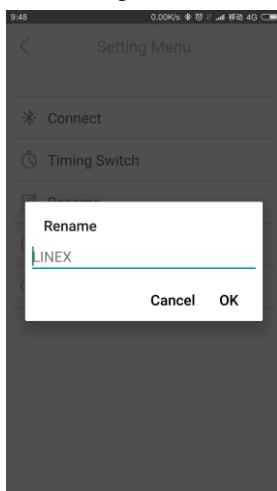



Figure 6



Rename: after click, the text frame display current name;after delete, input new name,return to finish rename. If character won't be input, the previous name will be displayed after return.




Connecetion method of IPHONE Bluetooth

First turn on Bluetooth in phone setting-Bluetooth,and find"LINEX***", click to connect;then find just connected"LINEX***" in APP ,click and finish connection.


Namming method of IPHONE:

Finrd APP --Rename, and type the name you want clct"OK"; turn off the power supply of equipment, and power on again after 5 seconds ;connect equipment name before change inAPP  --Connect;after exit from APP,theequipment name has be changed when connect Bluetooth again.The mobile phone displays the updated method of Bluetooth name: the equipment name will be updated when turn on or turn off Bluetooth,


Namming method of AndroidDevice:

Finrd APP --Rename, input the name you want clct"OK"; turn off the power supply of equipment, and power on again after 5 seconds ;the equipment name has be change when connect Bluetooth again.


Synchronized Operation of APP Songs:

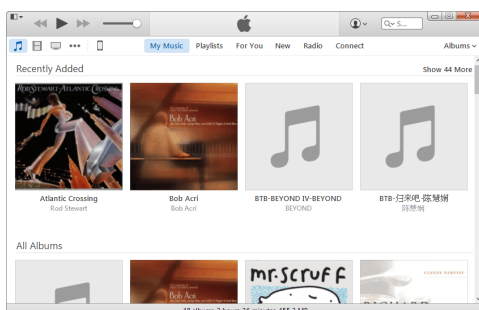

1.Connect the mobile phone to computer, andopen"iTunes"click small icon of mobile phone[as illustrared infigure]

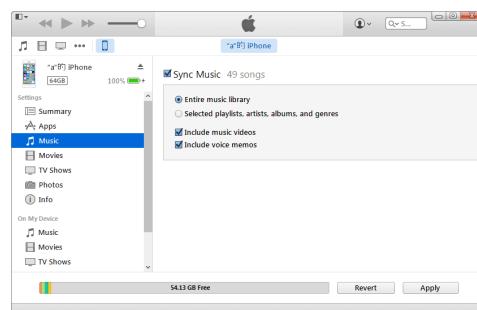

2.Click"music", and click "Sync Music" theclick"Sync"

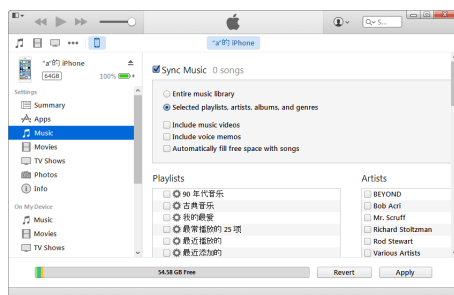

3. You can choose songs according to category: click "Sync Music" and click"Selected playlists, artists albums, and genres",choose the music you need, Then click "Sync";

4. If there is music downloaded from other palces, you can right click file name-choose"open methods"-then choose"iTunes" to synchronize songs.

! Notice:

In order to correctly use this product and ensure good performance, please read it carefully and observe:

- 1.If shake after installation, please tightening each connection part;
- 2.Do not impact the product seriously;
3. Do not contact with benzene , diluent , and other chemicals;
4. Please don't be close to strong magnetic field , electric field;
- 5.Please avoid direct light or heating apparatus;
6. Please don't remove , repair , renovate by yourself;
7. Please don't listen to it in larger volume to avoid causing bad influences to hearing;
8. Please properly handle packaging waste, old electronic products in classification .